MECH

MEIDE CASTING

MALLEABLE IRON PIPE FITTING

American Standard

c UL us LISTED

FM APPROVED

02-2018

Malleable Iron Pipe Fittings

American Standard Class 150

90
90° Elbow

90R
90° Reducing Elbow

90U
180° Return Elbow

92
90° Street Elbow

92R
90° Reducing Street Elbow

96A
Union Elbow

120
45° Elbow

121
45° Street Elbow

130
Tee

130R
Bull Head Tee

130R
Reducing Tee

130R
Reducing Tee

130R
Reducing Tee

130R
Reducing Tee

134
Service Tee

165
45° Lateral Y Branch

180
Cross

180R
Reducing Cross

220
Coupling

220S
L&R Coupling

240
Reducing Coupling

240T
Tapped Reducing Coupling

241
Outside Hex Bushing

241N
Inside Hex Bushing

245
Reducing Hexagon Nipple

280
Hexagon Nipple

246
Reducing Extension Piece

529A
Extension Piece



291
Cored Plug

291S
Solid Plug

NSF/ANSI 61 NSF/ANSI 372 ACS

Material: ASTM A197/A197M
Dimensions: ASME B16.3, B16.14
Union Dimensions: B16.39
Threads: ASME B1.20.1
Size Available: 1/8"- 8"

291N
Countersunk Plug

291-4
Bar Head Plug

300
Cap

310
Locknut

320
Wastenut

321
Floor Flange

321W
Floor Flange without Hole

342
Union with Brass Seat

1221
Side Outlet Elbow

1223
Side Outlet Tee

1224
Side Outlet Cross

LCC
Long Compression Coupling

WJFL
Tee Flange

90

90° Elbow



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	11/4	11/2
	mm	6	8	10	15	20	25	32	40
Dim. (mm)	A	17.5	20.6	24.1	28.5	33.3	38.1	44.5	49.3
Size	Inch	2	21/2	3	4	5	6	8	
	mm	50	65	80	100	125	150	200	
Dim. (mm)	A	57.2	68.6	78.2	96.3	114.3	130.3	162	

90R

90° Reducing Elbow



Size	Inch	4X11/4	4X11/2	4X2	4X21/2	4X3	3/8X1/8
	mm	100X32	100X40	100X50	100X65	100X80	10X6
Dim. (mm)	A	60	62	69	78	83.8	20.5
	B	85	85	87	90	91.4	21.6
Size	Inch	3/8X1/4	6X4	1/2X1/4	1/2X3/8	3/4X1/4	3/4X3/8
	mm	10X8	150X100	15X8	15X10	20X8	20X10
Dim. (mm)	A	22.4	102	24.6	26.4	26.7	28.5
	B	22.9	125	24.9	26.2	27.4	28.7

90R

90° Reducing Elbow



Size	Inch	3/4X1/2	1X1/4	1X3/8	1X1/2	1X3/4
	mm	20X15	25X8	25X10	25X15	25X20
Dim. (mm)	A	30.5	27	30	32	34.8
	B	31	31	32.3	35.5	36.8
Size	Inch	11/4X3/8	11/4X1/2	11/4X3/4	11/4X1	11/2X1/2
	mm	32X10	32X15	32X20	32X25	40X15
Dim. (mm)	A	32	34	36.8	40.1	35
	B	36.5	38.9	41.2	42.4	41.5

90R

90° Reducing Elbow



Size	Inch	11/2X3/4	11/2X1	11/2X11/4	2X1/2	2X3/4
	mm	40X20	40X25	40X32	50X15	50X20
Dim. (mm)	A	38.6	41.9	46.2	37.5	40.6
	B	44.5	45.7	47.8	47.5	50.0
Size	Inch	2X1	2X11/4	2X11/2	21/2X3/4	21/2X1
	mm	50X25	50X32	50X40	65X20	65X25
Dim. (mm)	A	43.9	48.3	51.3	42	46
	B	51.3	53.3	54.9	57	58.7

NSF/ANSI 61 NSF/ANSI 372 ACS

90R

90° Reducing Elbow



Size	Inch	21/2X11/4	21/2X11/2	21/2X2	3X3/4	3X1
	mm	65X32	65X40	65X50	80X20	80X25
Dim. (mm)	A	50.5	54.9	60.7	45	50
	B	60	63.8	66.0	65	67.5
Size	Inch	3X11/4	3X11/2	3X2	3X21/2	1/4X1/8
	mm	80X32	80X40	80X50	80X65	8X6
Dim. (mm)	A	55	58	64	71.9	18.8
	B	70	72	73.4	75.9	19.3

90U

180° Return Elbow



Size	Inch	1/2	2				
	mm	15	50				
Dim. (mm)	A	38.1	101.6				
Size	Inch						
	mm						
Dim. (mm)	A						

92

90° Street Elbow



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	11/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	17.5	20.6	24.1	28.5	33.3	38.1	44.5
	B	25.4	30.2	36.6	41.2	48.0	54.4	62.2
Size	Inch	11/2	2	21/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	49.3	57.2	68.6	78.2	96.3	130.3	
	B	68.3	82.8	98.0	114.6	144.5	204.0	

92R

90° Reducing Street Elbow



Size	Inch	3/4X1/2	1X3/4	11/4X1	11/2X11/4	
	mm	20X15	25X20	32X25	40X32	
Dim. (mm)	A	30	35	40		
	B	40	46	56		
Size	Inch					
	mm					
Dim. (mm)	A					
	B					

NSF/ANSI 61 NSF/ANSI 372 ACS

Basic Dimension for American Standard Pipe Threads



Taper thread

H= 0.866025 p=0.866025/n

h= 0.800 p=0.800/n



Taper thread

L2=(0.8D+6.8) 1/n=(0.80D+6.8)p

Nominal Pipe Size(inches)	O.D.of Pipe (D)	Threads /in (N)	Pitch of Thread (P)	Pitch Dia. at Beginning of External Thread(E0)	Handtight Engagement			Effective Thread.Extenal			Depth of Thread h
					Length[2] (L1)		Diam[3]. (E1)	Length[4] (L2)		Diam. (E2)	
					Inch	Thread		Inch	Thread		
1/8	0.405	27.0	0.03704	0.36351	0.1615	4.36	0.37360	0.2639	7.12	0.38000	0.029
1/4	0.540	18.0	0.05556	0.47739	0.2278	4.10	0.49163	0.4018	7.23	0.50250	0.044
3/8	0.675	18.0	0.05556	0.61201	0.2400	4.32	0.62701	0.4078	7.34	0.63750	0.044
1/2	0.840	14.0	0.07143	0.75843	0.3200	4.48	0.77843	0.5337	7.47	0.79179	0.057
3/4	1.050	14.0	0.07143	0.96768	0.3390	4.75	0.98887	0.5457	7.64	1.00179	0.057
1	1.315	11.5	0.08696	1.21363	0.4000	4.60	1.23863	0.6826	7.85	1.25630	0.069
11/4	1.660	11.5	0.08696	1.55713	0.4200	4.83	1.58338	0.7068	8.13	1.60130	0.069
11/2	1.900	11.5	0.08696	1.79609	0.4200	4.83	1.82234	0.7235	8.32	1.84130	0.069
2	2.375	11.5	0.08696	2.26902	0.4360	5.01	2.29627	0.7565	8.70	2.31630	0.069
21/2	2.875	8.0	0.12500	2.71953	0.6820	5.46	2.76216	131375	9.10	2.79062	0.100
3	3.500	8.0	0.12500	3.34062	0.7660	6.13	3.38850	1.2000	9.60	3.41562	0.100
31/2	4.000	8.0	0.12500	3.83750	0.8210	6.57	3.88881	1.2500	10.00	3.91562	0.100
4	4.500	8.0	0.12500	4.33438	0.8440	6.75	4.38712	1.3000	10.40	4.41562	0.100
5	5.563	8.0	0.12500	5.39073	0.9370	7.50	5.44929	1.4063	11.25	5.47862	0.100
6	6.625	8.0	0.12500	6.44609	0.9580	7.66	6.50597	1.5125	12.10	6.54062	0.100

Nominal Pipe Size (inchs)	Length,L1 Plane to L2 Plane External Thread (L2-L1)		Wrench Makeup Length for Internal Thread[7]			Vanish Thread (V)		Overall8 Length External Thread (L4)	Nominal Complete External Thread5		Height of Thread(h)	Increase in Diam./ Thread (0.0625/n)	Basic[6] Minor Diam.At Small End of Pipe(K0)
			Length(L3)		Diam. (E3)				Length. (L5)	Diam. (E5)			
	Inch	Thread	Inch	Thread		Inch	Thread						
1/8	0.1024	2.76	0.1111	3	0.35656	0.1285	3.47	0.3924	0.1898	0.37537	0.02963	0.00231	0.3339
1/4	0.1740	3.13	0.1667	3	0.46697	0.1928	3.47	0.5946	0.2907	0.49556	0.04444	0.00347	0.4329
3/8	0.1678	3.02	0.1667	3	0.60160	0.1928	3.47	0.6006	0.2967	0.63056	0.04444	0.00347	0.5676
1/2	0.2137	2.99	0.2143	3	0.74504	0.2478	3.47	0.7815	0.3909	0.78286	0.05714	0.00446	0.7013
3/4	0.2067	2.89	0.2143	3	0.95429	0.2478	3.47	0.7935	0.4029	0.99286	0.05714	0.00446	0.9105
1	0.2828	3.25	0.2609	3	1.19733	0.3017	3.47	0.9845	0.5089	1.24543	0.06957	0.00543	1.1441
11/4	0.2868	3.30	0.2609	3	1.54083	0.3017	3.47	1.0085	0.5329	1.59043	0.06957	0.00543	1.4876
11/2	0.3035	3.49	0.2609	3	1.77978	0.3017	3.47	1.0252	0.5496	1.83043	0.06957	0.00543	1.7265
2	0.3205	3.69	0.2609	3	2.25272	0.3017	3.47	1.0582	0.5826	2.30543	0.06957	0.00543	2.1995
21/2	0.4555	3.64	0.2500	2	2.70391	0.4337	3.47	1.5712	0.8875	2.77500	0.10000	0.00781	2.6195
3	0.4340	3.47	0.2500	2	3.32500	0.4337	3.47	1.6337	0.9500	3.40000	0.10000	0.00781	3.2406
31/2	0.4290	3.43	0.2500	2	3.82188	0.4337	3.47	1.6837	1.0000	3.90000	0.10000	0.00781	3.7375
4	0.4560	3.65	0.2500	2	4.31875	0.4337	3.47	1.7337	1.0500	4.40000	0.10000	0.00781	4.2344
5	0.4693	3.75	0.2500	2	5.37511	0.4337	3.47	1.8400	1.1563	5.46300	0.10000	0.00781	5.2907
6	0.5545	4.44	0.2500	2	6.43047	0.4337	3.47	1.9462	1.2625	6.52500	0.10000	0.00781	6.3461

Note:This information is selected from the International Standard for Pipe Threads, ASME B1.20.1.

Technical Information

1) Material

MECH Brands pipe fittings are made of back herart malleable cast iron.

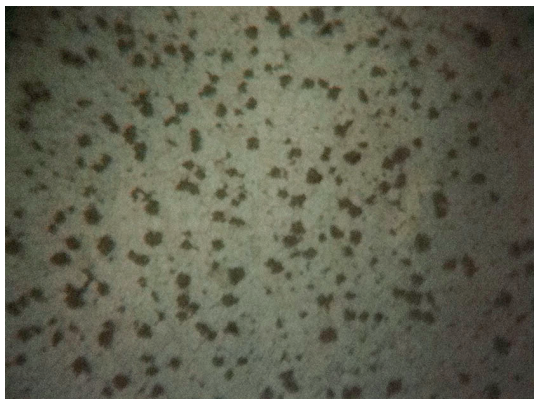

Microstructure of the MECH Brands Black Heart Malleablle Iron after annealing

2) Threads

a. MECH Brand class 150 pipe fittings: ANSI B1 . 20 . 1 . ISO 7/1

b. MECH Brand extra heavy class 300 pipe fittings: ANSI B1 . 20 . 1 . ISO 7/1

3) Pressure - Temperature Ratings

Pressure - Temperature Ratings are shown in the following table.

		Class 300, psig		
		Size	Size	Size
Tempreature, ° F	Class 150, psig	1/4 - 1	11/4 - 2	21/2 - 3
20 to 150	300	2000	1500	1000
200	265	1785	1350	910
250	225	1575	1200	825
300	185	1360	1050	735
350	150 Note (1)	1150	900	650
400	20 to 150	935	750	580
450	20 to 150	725	600	475
500	20 to 150	510	450	585
550	20 to 150	300	300	300

NOTE:
(1) Permissible for service temperature up to 366 ° F. reflection the temperature of saturated steam at 150psig.

NSF/ANSI 61 NSF/ANSI 372 ACS

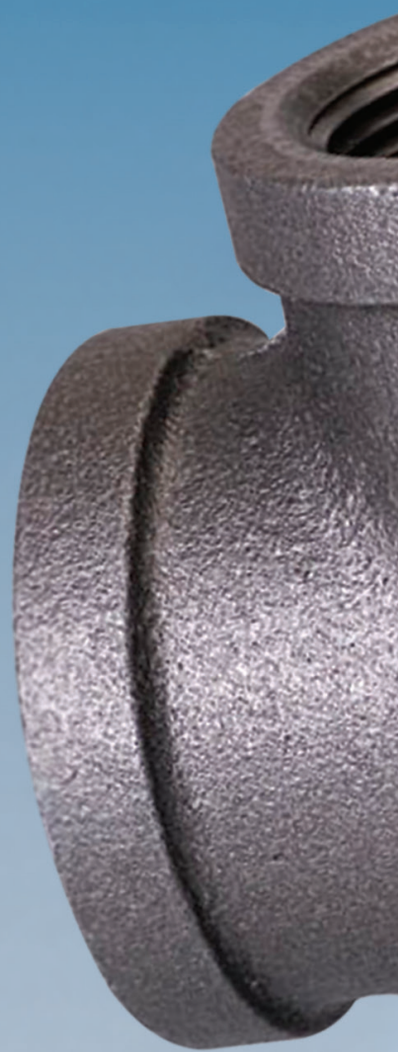

مؤسسة مستقبل الميكانيكا للتجارة
Future Mechanics Trading Est.

P.O. Box 28027-Riyadh 11437 - Kingdom of Saudi Arabia
Tel.: +966 11 478 4242 - Fax: +966 11 472 9595
www.fu-mech.com - info@fu-mech.com
www.medie-casting.com

فيو-مك
Fu-Mech