

Threaded Butterfly Valve with Tamper Switch (XD311X), UL/FM Approved




XD311X



RoHS


- Connection Ends: Thread to ASME B1.20.1
- Working Pressure: 175PSI
- Temperature Range: 0°C- 80°C
- Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550 or double coating of hot dipped galvanization plus electroplating

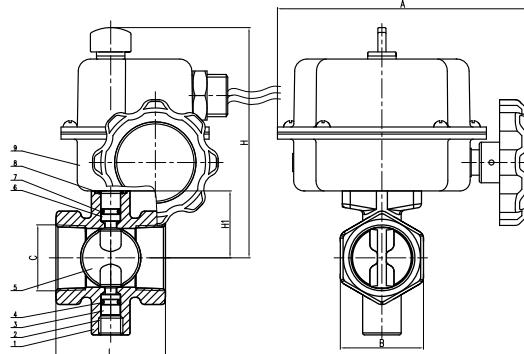

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification	Options
1	Valve Body	ASTM A536, 65-45-12	
2	Screw	Carbon Steel Zinc Plated	AISI 304, AISI 316
3	Stem	Stainless Steel	AISI 304, AISI 316, AISI 420, AISI SS431
4	O-Ring	NBR	EPDM
5	Disc	Carbon Steel+EPDM	Carbon Steel+NBR
6	Stem	Stainless Steel	AISI 304, AISI 316, AISI 420, AISI 431
7	O-Ring	NBR	EPDM
8	O-Ring	NBR	EPDM
9	Signal Gearbox	Carbon Steel	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

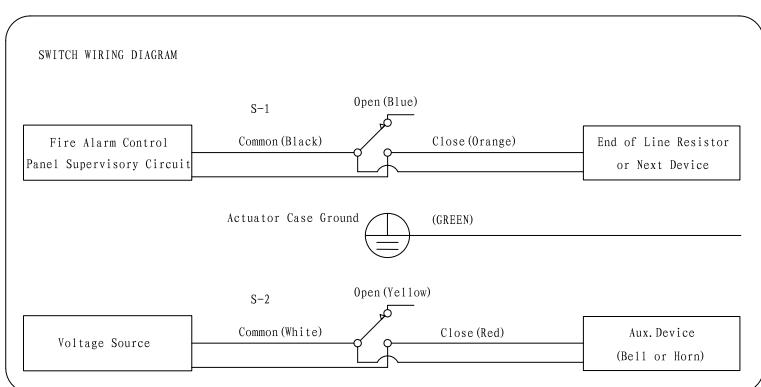

DN		Dimensions(mm)						
Inch	mm	L	H	H1	A	B	C(NPT)	
1"	25	54	115	33	125	41	1	
1.25"	32	67	117.5	37	125	49	11/4	
1.5"	40	73	121	40.5	125	55.5	11/2	
2"	50	82.5	131	48	125	71	2	