


Flanged Wet Alarm Valve (ZSFZ4X9)



ZSFZ4X9



- Connection Ends: ASME B16.1 CL125
ASME B16.42 CL150
- Working Pressure: 300PSI
200PSI and 250PSI available upon request
- Temperature Range: 4°C - 60°C
- Coating: Painting or Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550


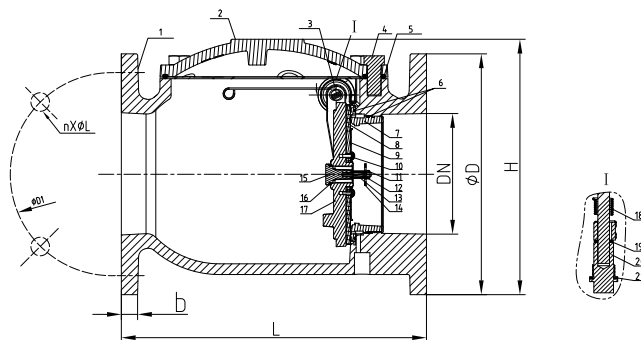


MATERIAL SPECIFICATION

Part No.	Part	Standard Specification
1	Valve Body	ASTM A536, 65-45-12
2	Bonnet	ASTM A536, 65-45-12
3	Pin	AISI 304
4	Hex Bolt	Carbon Steel Zinc Plated
5	Body Gasket	EPDM
6	O-Ring	NBR
7	Seat	Bronze
8	Gasket	EPDM
9	Disc Gland	AISI 304
10	Slotted Screw	AISI 304
11	Hexagonal Nut	AISI 304
12	Adjusting Screw	AISI 304
13	Core Tube	AISI 304
14	Core Board	AISI 304
15	Disc Core	Bronze
16	O-Ring	NBR
17	Disc	Bronze
18	Spring	AISI 304
19	Sealing Fillet Gasket	PTFE
20	Sealing Plug	AISI 304
21	Sealing Fillet Gasket	PTFE

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions(mm)					
Inch	mm	H	L	D	DI	b	n-φL
3"	80	235	241	191	152.4	19	4-φ 19.1
4"	100	241	292	229	190.5	24	8-φ 19.1
6"	150	298	356	279	241.3	25.5	8-φ 22.2
8"	200	352	495	343	298.5	28.5	8-φ 22.2

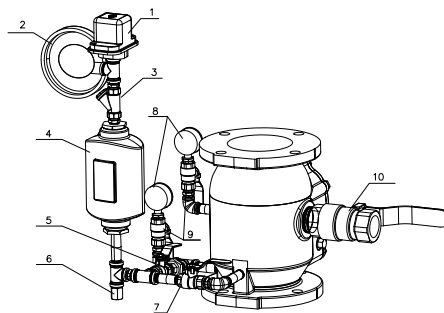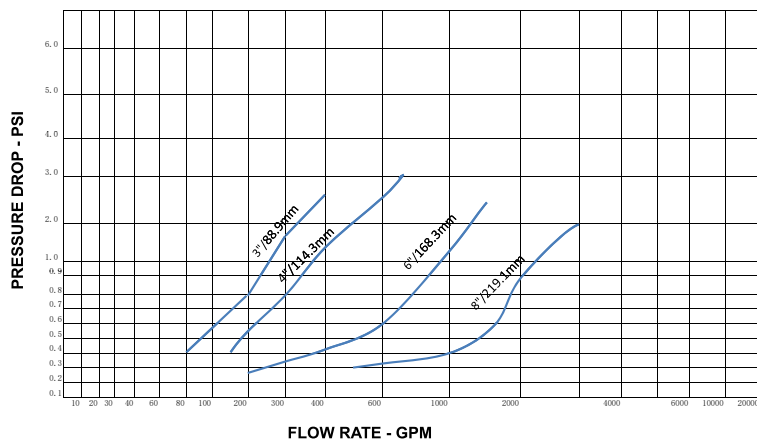

Outside Part			
Part No.	Part	Part No.	Part
1	Pressure Switch	6	Drip Valve
2	Alarm	7	Alarm Ball Valve
3	Strainer	8	Pressure Gauge
4	Retard Chamber	9	Pressure Gauge Ball Valve
5	Test Ball Valve	10	Drain Ball Valve