
A105

300 PSI
RATED PRESSURE

BRANDING:
A105/1 - AUTO-SPKR,
A105/2 - STANDPIPE
A105/3 - PLAIN



EXPOSED FIRE DEPT. INLET CONNECTION CLAPPER TYPE

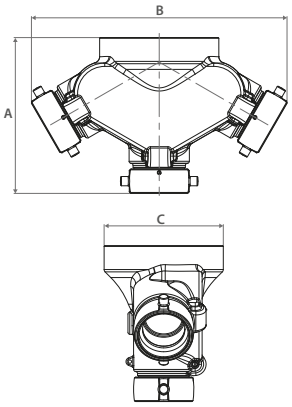

THREE WAY TRIPLE CLAPPER BACK



TWO WAY DOUBLE CLAPPER BACK

Used as an auxiliary inlet connection providing 500 GPM minimum to supplement the fire protection water supply. Swing clapper provides full waterway. Exposed design provides an convenient method of satisfying Fire Dept. inlet requirements.

STANDARD EQUIPMENT:

Cast brass two-way or three-way inlet body with drop clappers on each way and pin lug hose thread swivels; straight NPT outlet connection.

RELATED PRODUCTS



A81 p. 61

SIZE	WAYS	CERTIFICATIONS	DIMENSIONS			FINISHING				BRANDING
			A	B	C	BRASS	POLISHED	CHROME	POLISHED CHROME	
GROOVE CONNECTION										
4" x 2-1/2"	2		9-13/32"	13-9/32"	5-1/32"	●				
6" x 2-1/2"	2		9-17/64"	15-13/64"	7-3/32"	●				
THREAD CONNECTION										
4" x 2-1/2"	2	FM APPROVED; c UL us LISTED; **175 PSI**	7-9/32"	11-21/32"	5-1/32"	●				AUTO-SPKR STANDPIPE
4" x 3"	2	UL LISTED; **300 PSI**	8-1/32"	12-7/8"	5-1/32"	●				AUTO-SPKR STANDPIPE NEUTRAL
6" x 2-1/2"	2	UL LISTED; **175 PSI**	8-5/32"	11-21/32"	7-3/32"	●				AUTO-SPKR STANDPIPE NEUTRAL
6" x 3"	2	UL LISTED; **300 PSI**	8-3/4"	12-7/8"	7-15/32"	●				AUTO-SPKR STANDPIPE NEUTRAL
4" x 2-1/2"	3		9-1/4"	15-3/16"	7-3/32"	●				AUTO-SPKR STANDPIPE
6" x 2-1/2"	3		9-1/4"	15-3/16"	7-3/32"	●				AUTO-SPKR STANDPIPE NEUTRAL