

5.1 TEST AND DRAIN VALVES, LINE TESTER

A61

300 PSI
RATED PRESSURE

TEST AND DRAIN VALVE



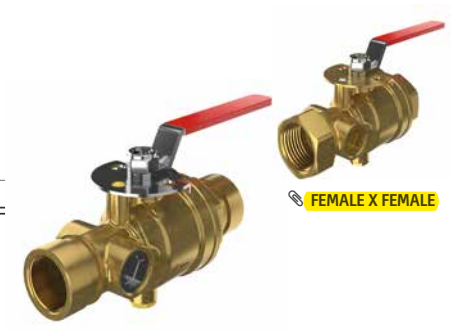

FEMALE X FEMALE

GROOVE X GROOVE

It combines the function of testing and draining the system.

STANDARD EQUIPMENT:

Groove or female NPT or Rp ISO thread inlet and outlet, forged brass body, chrome plated ball with PTFE seats.

SIZE	CERTIFICATIONS	DIMENSIONS							FINISHING			
		C (plug)	Port	A	B	C	D	H	BRASS	POLISHED	CHROME	POLISHED CHROME
FEMALE X FEMALE												
1"	FM APPROVED c UL us LISTED	5-1/32"	2-11/16"	5-11/32"	4-13/32"	-	-	1-29/32"	●			
1-1/4"	FM APPROVED c UL us LISTED	5-1/32"	2-11/16"	5-11/32"	4-13/32"	-	-	1-29/32"	●			
1-1/2"	FM APPROVED c UL us LISTED	6-3/16"	4"	6-13/16"	6-9/32"	-	-	2-5/8"	●			
2"	FM APPROVED c UL us LISTED	6-3/16"	4"	6-13/16"	6-9/32"	-	-	2-5/8"	●			
GROOVE X GROOVE												
1-1/4"	FM APPROVED c UL us LISTED	1/4"	1-1/16"	6-13/32"	2-43/64"	5-11/32"	4-27/64"	1-1/4" groove	●			
2"	FM APPROVED c UL us LISTED	1/4"	1-12/16"	7-17/32"	4"	6-26/32"	6-21/64"	2" groove	●			

SIZE	ORIFICE	K FACTOR
1"	3/8"	2.8
	7/16"	4.2
	1/2"	5.6
	17/32"	8.0
1-1/4"	3/8"	2.8
	7/16"	4.2
	1/2"	5.6
	17/32"	8.0
	5/8"	11.2
	3/4"	14.0
1-1/2"	7/16"	4.2
	1/2"	5.6
	17/32"	8.0
	5/8"	11.2
	3/4"	14.0
	15/16"	16.8
	1-5/64"	22.4
	1-9/64"	25.2

SIZE	ORIFICE	K FACTOR
2"	7/16"	4.2
	1/2"	5.6
	17/32"	8.0
	5/8"	11.2
	3/4"	14.0
	15/16"	16.8
	1-5/64"	22.4
	1-9/64"	25.2